


BLASTPRO - SBD030

Sandblast Hose , 10 Bar

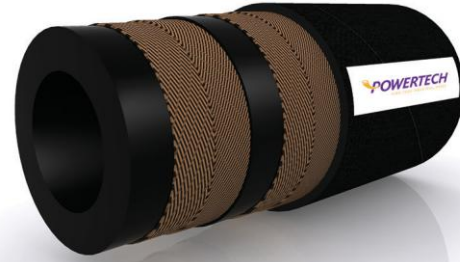

Code	ID (mm)	OD (mm)	Wall (mm)	Working Pressure (bar)	Burst Pressure (bar)	Bending Radius (mm)	Weight (kg/m)	Max. Length (m)
SBD030-19x7	19	33	7	10	30	155	0,76	40
SBD030-19x9.5	19	38	9,5	10	30	155	1,10	40
SBD030-25x7	25	39	7	10	30	208	0,88	40
SBD030-25x11	25	48	11,5	10	30	208	1,46	40
SBD030-32x8	32	48	8	10	30	262	1,22	40
SBD030-32x11	32	55	11,5	10	30	262	1,75	40
SBD030-38x9	38	56	9	10	30	313	1,63	40
SBD030-38x11	51	71	10	10	30	417	2,14	40
SBD030-51x11	63	85	11	10	30	486	3,06	40

Application

Abrasion resistant hose suitable for blasting applications

Temperature

-30°C to +85°C

Features

Wear resistant, sturdy and durable, highly kink resistant compatible with international standard fittings

Type

Mandrel built

Tube

Blend of synthetic and natural rubber compound, black, smooth, anti-static, abrasion resistant according to DIN 53516: ~70mm³

Reinforcement

High tensile textile cord fabric

Cover

Blend of synthetic and natural rubber compound, black, smooth with cloth impression, anti-static, abrasion, weather and ozone resistant

Standard/Notice

EN ISO 3861

Marking

Embossed or Transfer Label

Standards/Approvals

Comments