


VENTO40- APB160Y

Steel Wire Reinforced Air Hose,
40 Bar

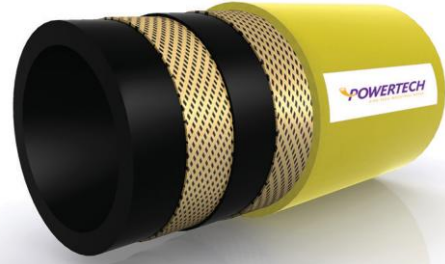

Code	ID (mm)	OD (mm)	Wall (mm)	Working Pressure (bar)	Burst Pressure (bar)	Bending Radius (mm)	Weight (kg/m)	Max. Length (m)
APB160Y-19x6	19	31	6	40	160	160	0,62	40
APB160Y-25x6.5	25	38	6,5	40	160	220	1,04	40
APB160Y-32x7	32	46	7	40	160	268	1,43	40
APB160Y-38x7	38	52	7	40	160	324	1,70	40
APB160Y-51x7.5	51	66	7,5	40	160	433	2,59	40
APB160Y-63x8	63	79	8	40	160	544	3,52	40
APB160Y-76x9	76	94	9	40	160	608	4,41	40
APB160Y-102x10	102	122	10	40	160	816	6,67	40

Application

Heavy duty air hose used in mines, construction and high pressure industrial applications

Temperature

-30°C to +85°C

Features

Constructed to protect against bursts, long-lasting, yellow cover

Type

Mandrel built

Tube

Blend of synthetic rubber compounds, black, smooth, suitable for high pressure air, resistant to oil mist

Reinforcement

Steel wire cord fabric reinforced

Cover

Synthetic rubber compound, yellow, smooth with cloth impression, weather, ozone and abrasion resistant

Standard/Notice

Can be made with an MSHA approved cover compound

Marking

Embossed or Transfer Label

Standards/Approvals

Comments